

## Vision 305s

### Description

Vision 305s is a robust 5.0" touchscreen display with a built-in controller. Besides several communication interfaces, the display is equipped with an ambient light sensor, a multi-color LED and an integrated loudspeaker. The Vision 305s display is optically bonded for perfect sunlight readability. The housing is sealed and the device can withstand extreme temperatures as well as shocks and vibrations.

### Specifications

Display diagonal size	5.0", 15:9 aspect ratio
Dimensions	163 x 99.7 x 40.8 mm
Weight	560 g
Resolution	800 (W) x 480 (H) pixels
LCD type	TFT color graphic; optically bonded. capacitive touch
Backlight	LED

### Optical Characteristics

Luminance	800 cd /m <sup>2</sup> typ.
Viewing angle	V = +/- 70 deg. H = +/- 70 deg.
Contrast ratio	700:1

### Maximum Ratings

Operating temperature	-30 to +75 °C (ambient)
Storage temperature	-40 to +85 °C
Supply voltage	8 to 36 V

### Standards

CE-Mark	2014/30/EU
E-Mark	ECE 10R
EMC	ISO 14982 EN 13309 EN 50498 ISO 61000-6-2 ISO 61000-6-4
Ingress protection	ISO 20653 IP6k5



### System components

- Freescale i.MX6S application processor, 32-bit ARM, 800 MHz
- 2 GB Flash, 512 MB RAM
- RTC buffered by supercapacitor
- Display backlight auto-dimmable via ambient light sensor
- Stand-alone or in-dash mount, landscape or portrait orientation
- Projective capacitive touchscreen
- Optically bonded

### Interfaces


- 2 x CAN (one ISOBUS compliant), 10 kbit/s up to 1 Mbit/s
- 1 x USB 2.0 (Type A)
- RGB Status LED
- 1 x RS-232
- Terminal 15 key switch (ignition)
- 1 x integrated loudspeaker

### Software

- Available with the software platform MATCH® by HYDAC Software.
- Programmable with CODESYS® V3 with enhanced target visualization, including support for CANopen® master or C/C++
- ISO-VT application support

Reverse polarity protection and protection of all external interfaces (except USB) against short circuit to GND and BAT+.

## Block Diagram

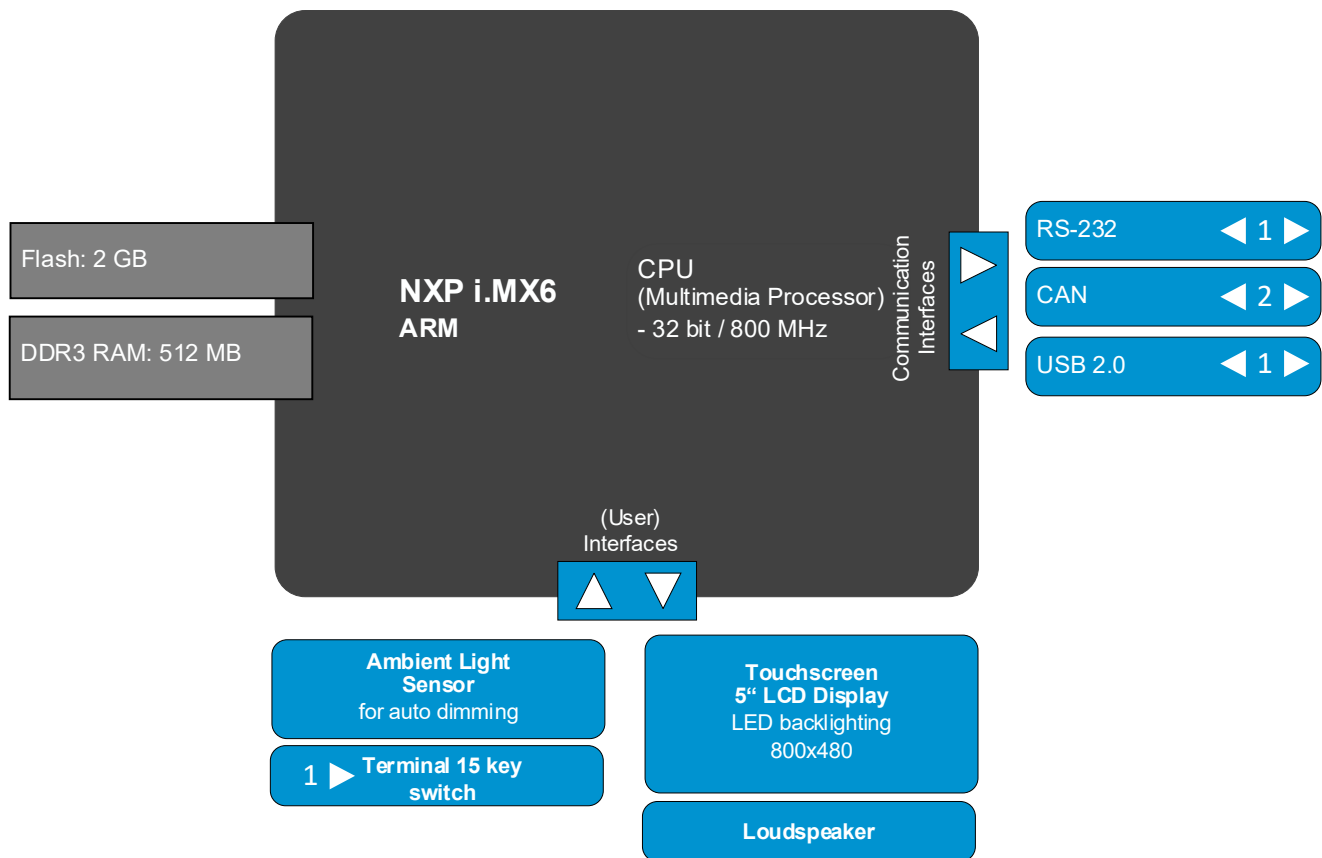

Subject to changes and corrections. Vision 305s is a product name of TTControl GmbH. CODESYS® is a registered trademark of CODESYS GmbH. CANopen® and CiA® are registered community trademarks of CAN in Automation). All other trademarks are the property of their respective holders. To the extent possible under applicable law, TTControl hereby disclaims any and all liability for the content and use of this product flyer.