

USB Connectivity Module

Description

TTControl USB Connectivity Module expands the capabilities of other TTControl products by providing network access (WLAN, BT) through a USB port.

Specifications

Parameter		Unit
ECU Dimensions	122 x 98.4 x 30	mm
Dimensions for minimum connector release clearance	57	mm
Weight	200	g
Connector	1x HSD USB 2x FAKRA for Antennas	
Operating Temperature	-40 to 75	°C
Operating Altitude	0 to 4000	m
Supply Voltage	5 (via USB)	V
Total Load Current	1.5	A _{max}
Standards		
CE	2014/53/EU 2011/65/EU	
UN/ECE	Regulation 10 Rev.6	
FCC	contains ID VPYLB2AE	
EMC	EN 301 489-52, EN 301 908-1, EN 301 511, EN 301 893, EN 300 440, EN 300 328, EN 303 413	
Protection rating	EN 60529 IP 67 ISO 20653 IP 6K9K	
Climatic	ISO 16750-4	
Mechanical	ISO 16750-3	

Features

- Wi-Fi 11a/b/g/n/ac
- 2.4GHz/5GHz Wi-Fi
- Bluetooth 5.2


Interfaces

- 1x USB
- 2x Antennas



Housing and Connector

Aluminum baseplate with plastic top

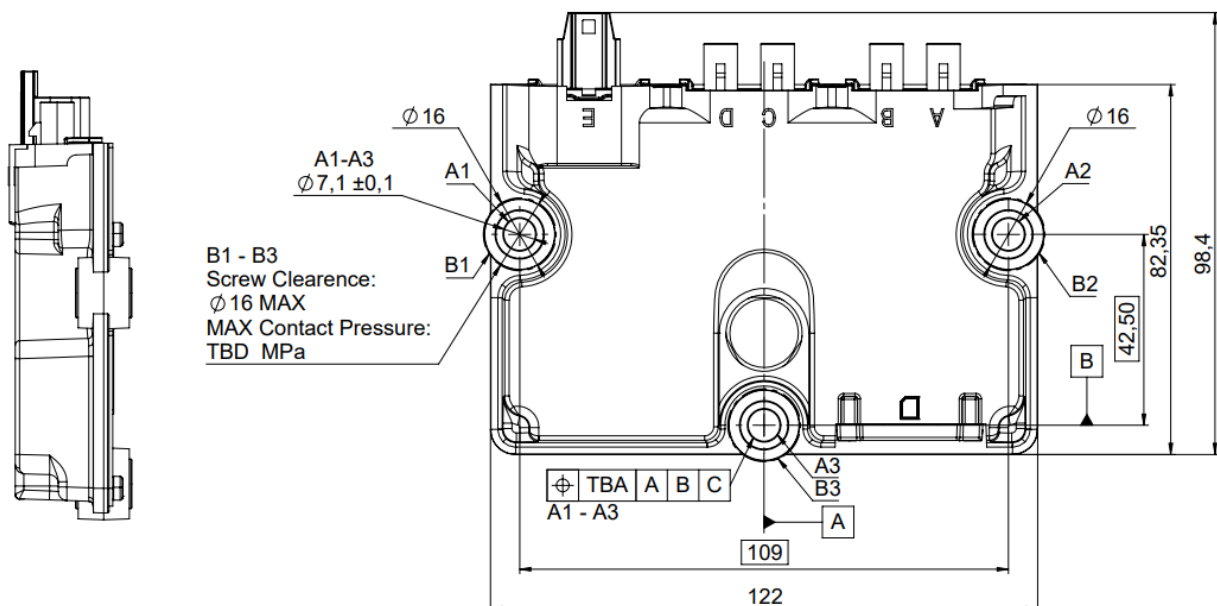

For further information, including price and availability, please contact products@ttcontrol.com

TTControl S.r.l. – Brixen, Italy

Tel. +39 0472 26 80-11,

office@ttcontrol.com, www.ttcontrol.com

TTControl GmbH – Vienna, Austria

Tel.: +43 1 585 34 34-0

Document number: D-USBCM-S-74-001